

FORD ECOTORQ 9E33-9E36

243-265 kW (330-360 PS)

Stage V, Tier 4f emission

For non-road mobile machinery



Features

Low cost of ownership

Through world class fuel economy, long maintenance interval and use of widely available maintenance parts, Ecotorq engines care about your business.

High uptime

Single engine architecture and powerful diagnostics make this engine easier to fix and reduce downtime.

Reliable and durable

Based on a field proven design, this is an engine you can count on for your toughest jobs without compromising on performance.

Specification

Model	9E33	9E36
Cylinders	6 in-line	
Displacement, liters (in ³)	8,974 (547,6)	
Bore and stroke, mm (in)	115 x 144 (4,53 x 5,67)	
Compression ratio	17,4 : 1	
Max. power, kW (PS)	243 (330)	265 (360)
at speed, rpm	1.700-2.100	1.580-2.100
Max. torque, Nm (lb.ft)	1.400 (1.033)	1.600 (1.180)
at speed, rpm	1.200-1.700	1.200-1.580
Idling speed, rpm	550	
Combustion system	Direct injection	
Liner type	Parent bore	
Aspiration	Turbocharged aftercooled	
Cooling	Liquid, 50:50 water glycol mix	
Flywheel dimensions	SAE 1 housing / SAE 11.5, 10, 8 in. flywheel	
Rotation	Counter clockwise (viewed from flywheel)	
Dry weight, kg (lb)	850 (1.874)	
Lubrication oil capacity, liters (in ³)	28 (1.709)	
CAN protocol	SAE J1939	
Emission technology	Cooled EGR, box type DOC+DPF+SCR	

Standard

- Electronically controlled
- High pressure common rail
- Cast iron engine block
- Alloy steel crank with induction hardened and polished bearing surfaces
- Friction welded aluminum pistons
- Variable geometry turbocharger
- Spin-on, full flow fuel filter
- Spin-on, full flow oil filter
- Spin-on coolant filter
- Integrated oil cooler
- Deep front oil sump
- Easy access oil dipstick
- Closed crankcase ventilation
- Alternator 130 A
- Starter 5,5 kW
- Belt driven cooling fan interface
- SAE 5W/30 lubrication oil
- Emission components (exhaust after treatment box, sensors, Adblue system)

Optional

- Air cleaner
- 55 L Adblue tank
- 360 or 630 cc air compressor
- A/C compressor
- SAE 14 in. flywheel
- Fuel pre-filter with water separation and water-in-fuel sensor
- Shallow or center type oil sump
- Grid heater for intake air

This leaflet provides information about the current technical specifications and the standard or optional equipment available as of the date it was issued. Specifications may be changed from time to time without prior notice. For this reason, please consult us to obtain updated and accurate information on the engines you wish to buy. The images used in this leaflet may be different from the engines on sale. The technical specifications provided herein are for standard engines. Selection of any optional equipment might cause differences from these specifications.

FORD OTOSAN

February 2025

Public

FORD ECOTORQ 9E33-9E36


243-265 kW (330-360 PS)

Stage V, Tier 4f emission

For non-road mobile machinery


Dimensions

All dimensions are in mm.

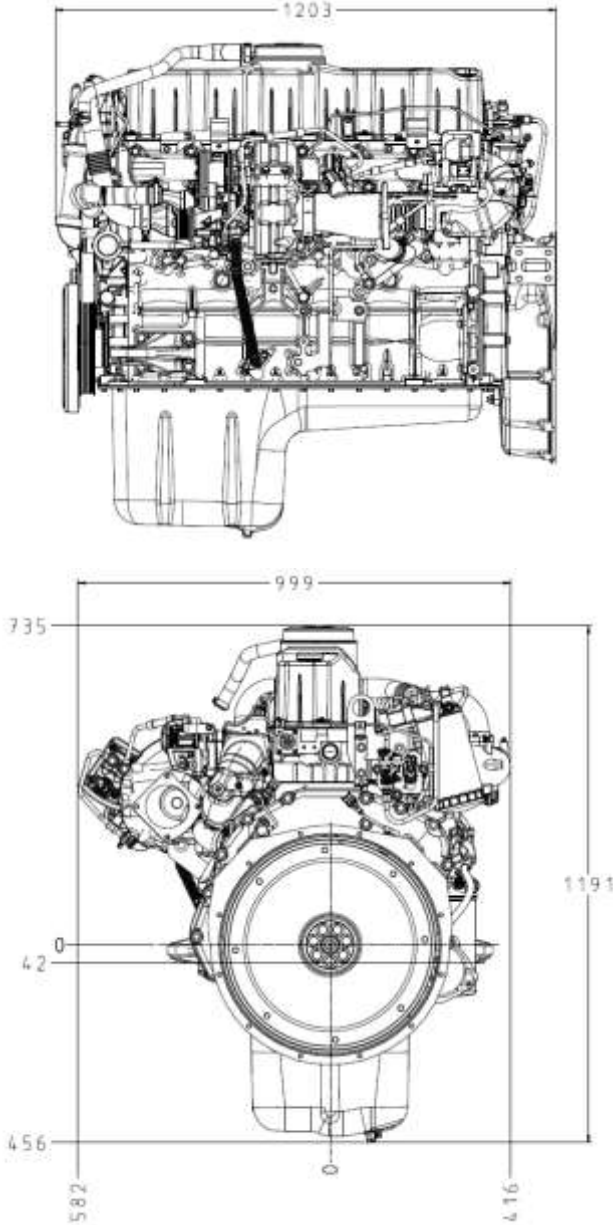

Performance

According to ISO 3046 and ISO 8178

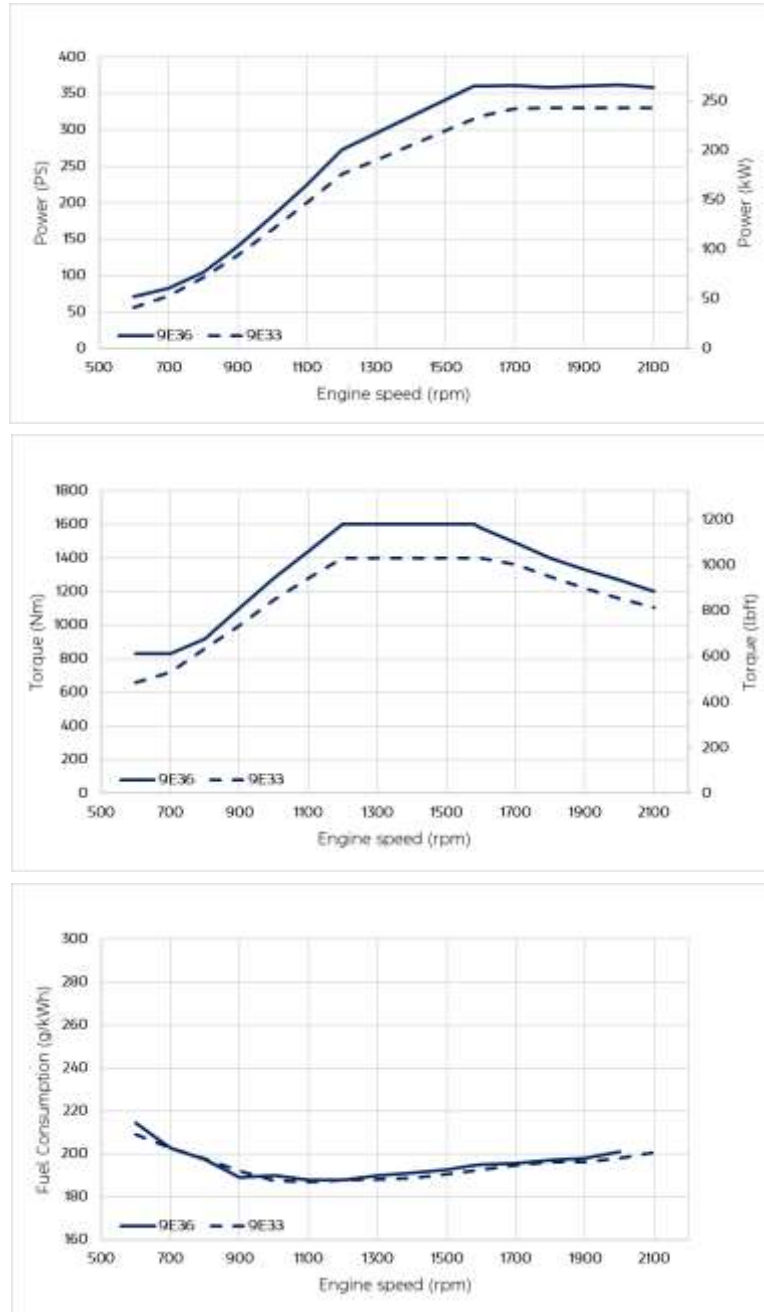

For more information please contact ecotorq@ford.com.tr or visit our site www.fordotosan.com.tr/en

This leaflet provides information about the current technical specifications and the standard or optional equipment available as of the date it was issued. Specifications may be changed from time to time without prior notice. For this reason, please consult us to obtain updated and accurate information on the engines you wish to buy. The images used in this leaflet may be different from the engines on sale. The technical specifications provided herein are for standard engines. Selection of any optional equipment might cause differences from these specifications.

FORD OTOSAN